




SUZUKI JIMNY

Item	Description	Draw	QTY	Spec	Item	Description	Draw	QTY	Spec
A	Front bumper				Q	Spacer		11	φ 12*φ 35*3
B	Winch mount		1	770*308*190	R	Hex screw		10	M6*20
C	Fangs		2	259*151*86	S	Hex nut		8	M6
D	Hoop		1	715*109*128	T	Spacer		18	φ 6*φ 16*1
E	plate connecting bumper and girder		2	287*71*39	U	Spacer		10	M6
F	Spacer		1	φ 60*φ 13*6	V	Girder connector		2	
G	LED light		2	192*32.5*54	W	Rille fix plate		1	
H	Hex screw		13	M12*35	X	Winch base		1	405*161*92
I	Hex nut		1	M12*50	Y	Hex screw		4	M10*30
J	Spacer		24	φ 12*φ 24*2	Z	Hex nut		4	M10
K	Spacer				AA	Hex screw		4	M12*40
L	Hex nut		18	M12	AB	Connector plate			
M	Hex screw		6	M10*25	AC	Connector palte		2	
N	Spacer		14	φ 10*φ 30*3					
O	Spacer		10	M10					
P	License plate mounting bracket		1	314*56*30					

STEP ONE

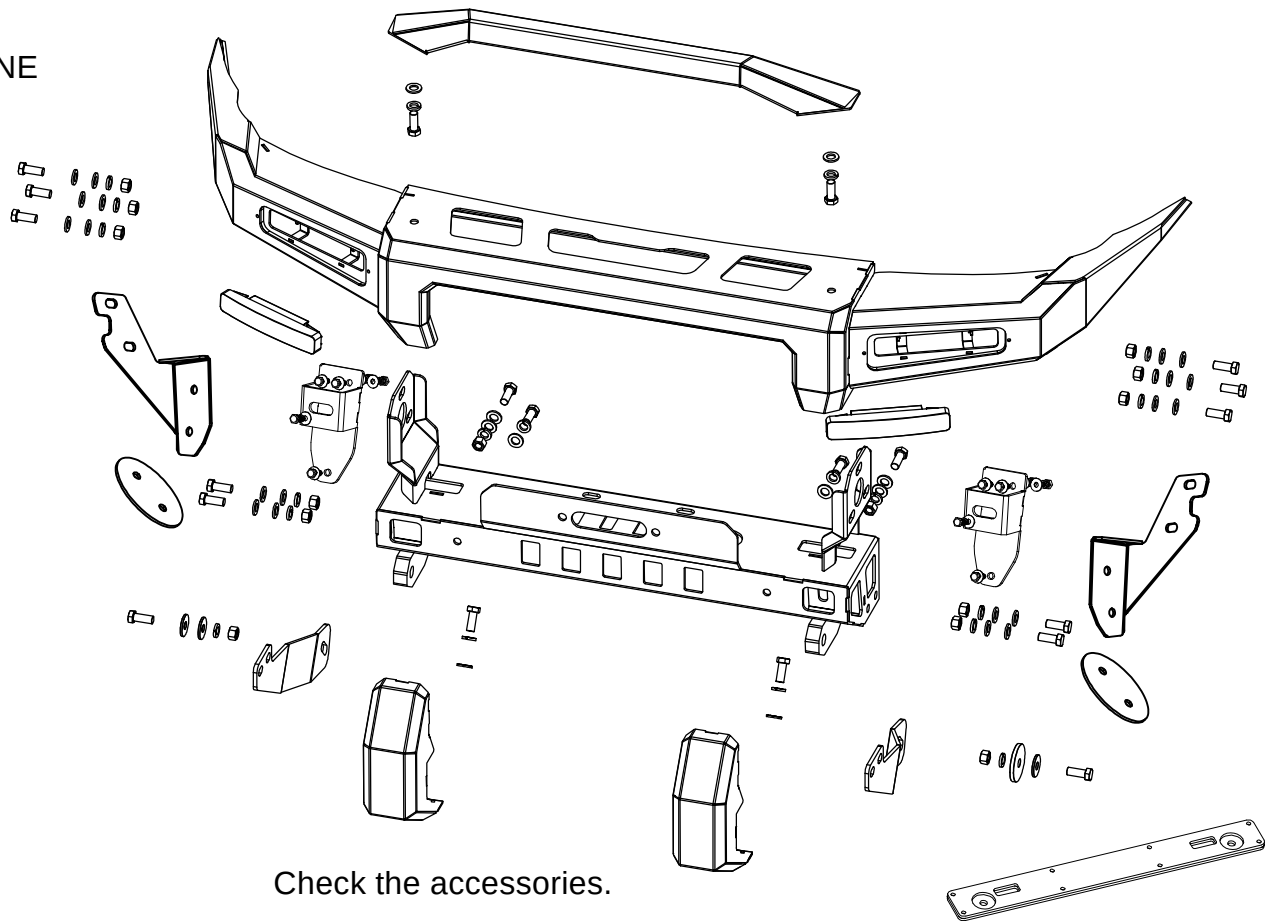


STEP TWO




Remove the original bumper.

STEP THREE

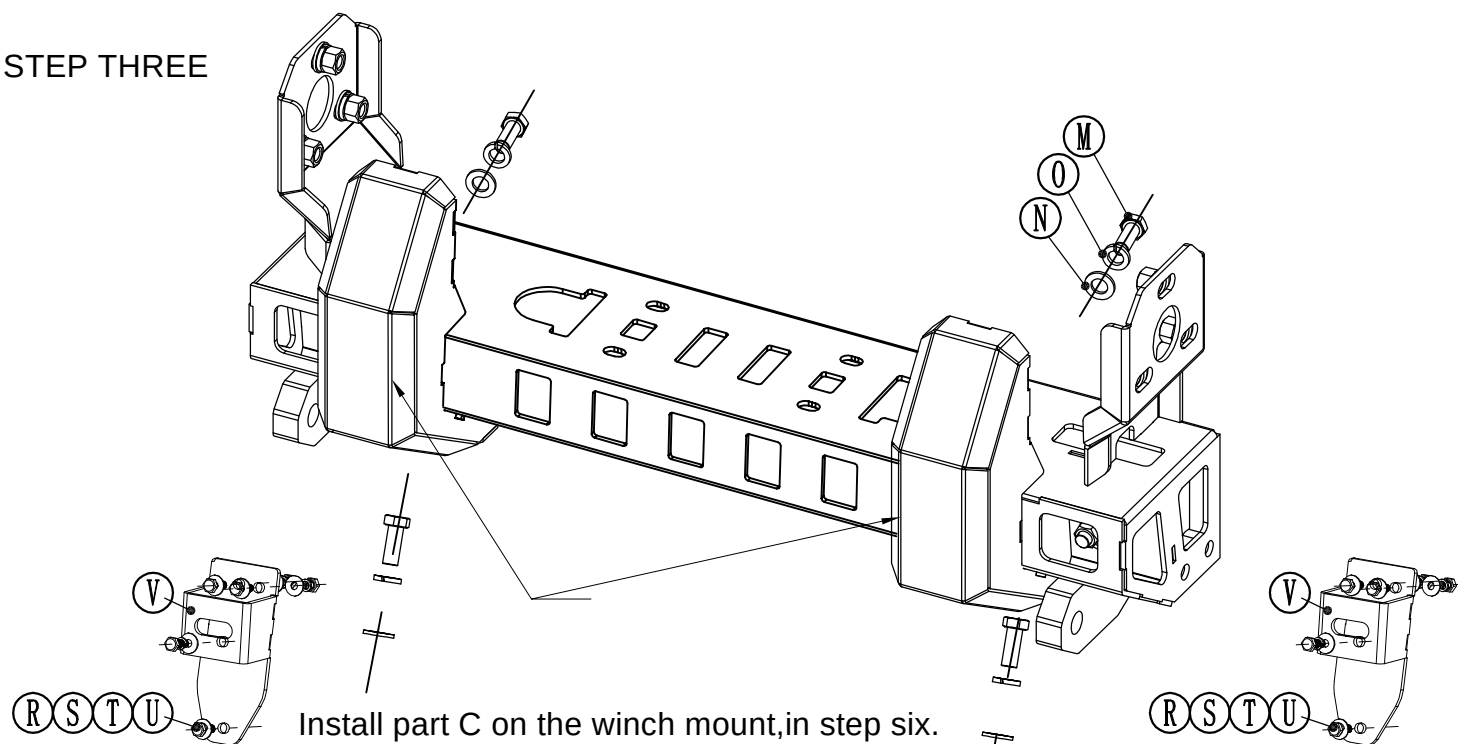


Install part V (2 sets) on the girder with R (8 pcs), S (4 pcs), T (12 pcs), U (8 pcs). Only Jimny 2012+ need to install this part.

STEP FOUR

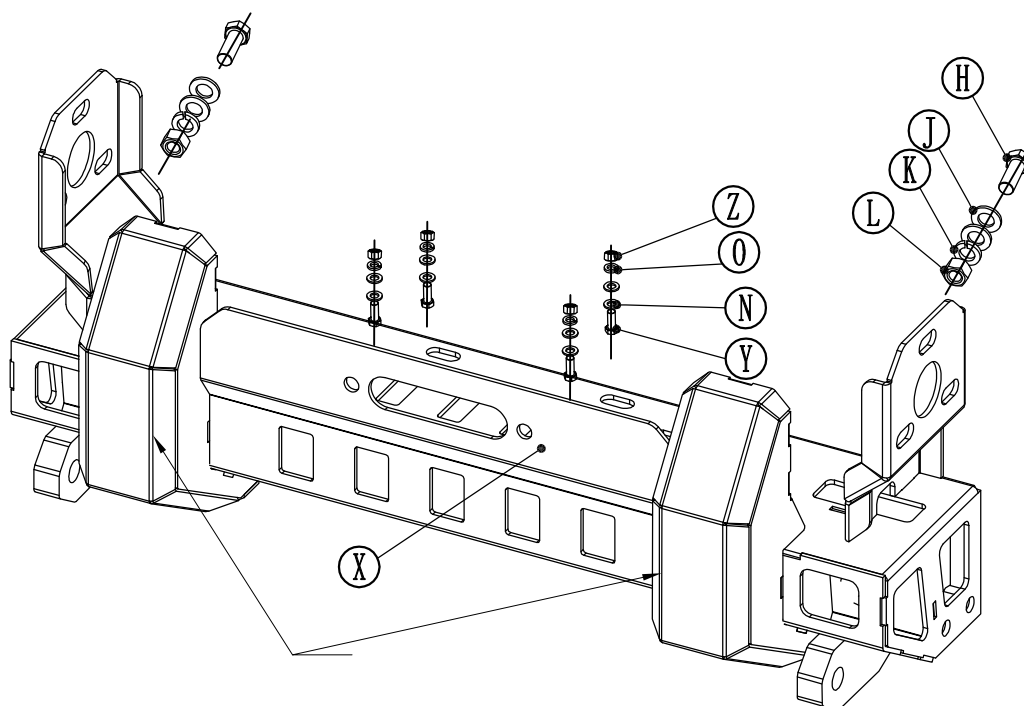

Install the winch mount on the vehicle with original holes, use H (2 pcs), J (4 pcs), K (2 pcs) and L (2 pcs) to fix.

Install Part X with Y (4 pcs), N (8 pcs), O (4 pcs) and Z (4 pcs) fixed.

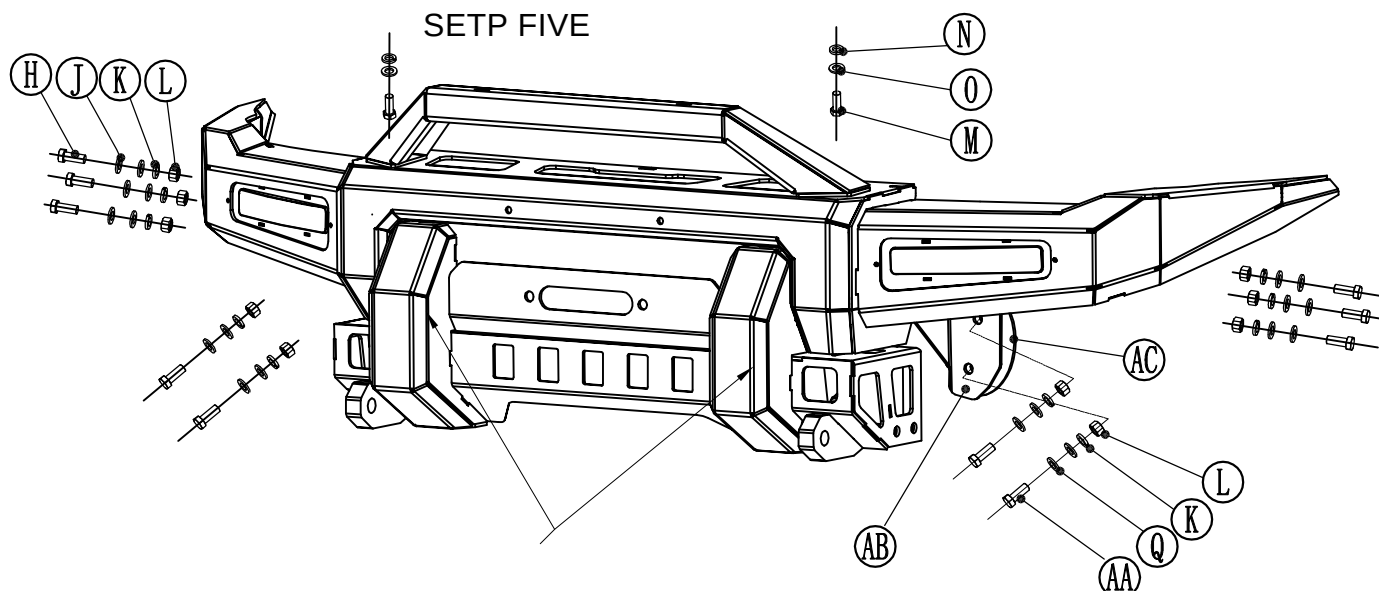


Install part G on the part A with the original screws of the part G. Then install part D ,with M(2pcs),N(1pcs),O(2pcs). fixed.

Install part A on the part B with H(6pcs),J(12pcs),K(6pcs),L(6pcs) fixed.

Install part AB and part AC on the vehicle with AA(4pcs),Q(8pcs),K(4pcs),L(4pcs) fixed.

Notice: please make sure the distance between bumper and vehicle should be 10mm.

STEP SIX

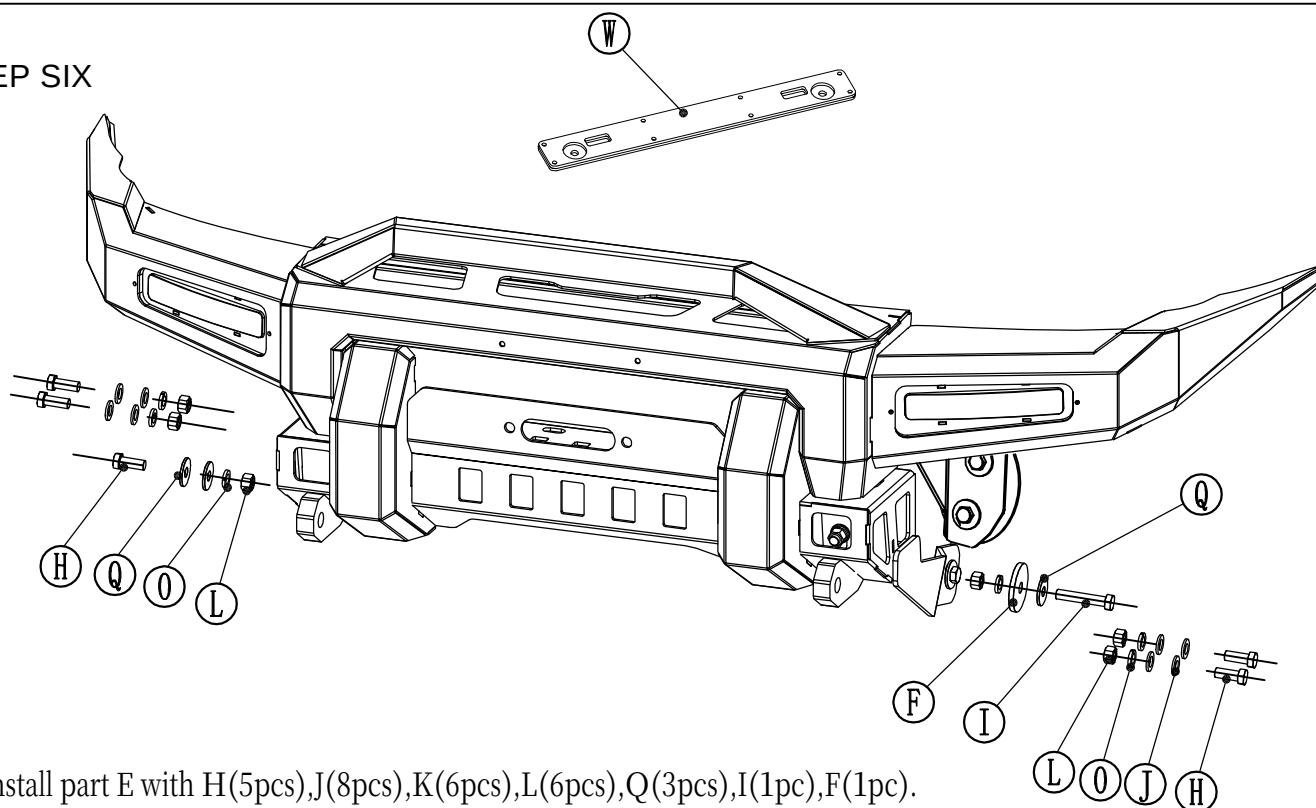


Install part E with H(5pcs),J(8pcs),K(6pcs),L(6pcs),Q(3pcs),I(1pc),F(1pc).

Part W is used for 2012-2016 Jimny only.

Install part C on part B ,with M(4pcs),N(4pcs),O(4pcs) fixed.

STEP SEVEN

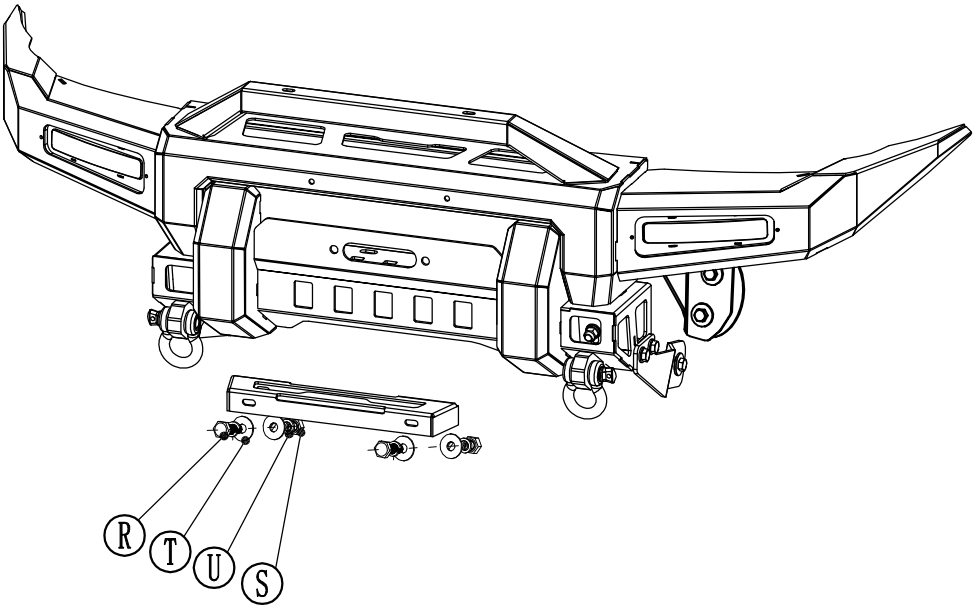

Install part P on part A with R(2pcs),S(2pcs),T(4pcs),U(2pcs) fixed
extra 2pcs part S, 2pcs part T and 2pcs part U are used for install license.



Finish.